

## 7.16.10

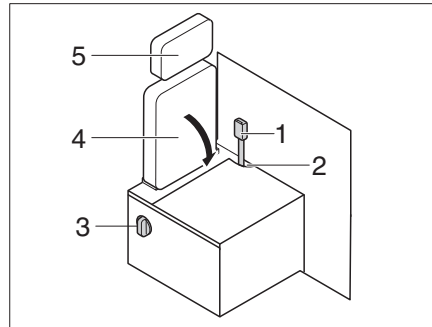
**Converting individual seats from driving to living areas (Just Go)**

Fig. 218 Driving - living conversion

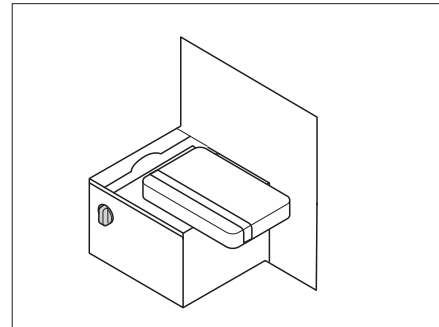


Fig. 219 Backrest folded down

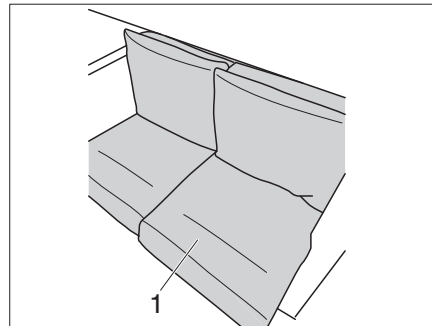


Fig. 220 Put cushion on top



The back of the seat cushion (Fig. 220,1) is reinforced by plastic.

▷ Make sure that the seat cushion with reinforcement is inserted on the right-hand side.

- Remove the back cushions and seat cushions and lay them aside.
- Remove the headrest (Fig. 218,5) (see chapter 5.7).
- Insert the seat belt buckle (Fig. 218,1) into the opening (Fig. 218,2).
- Engage the lever (Fig. 218,3) and fold down the backrest (Fig. 218,4).
- Put the cushion with reinforcement (Fig. 220,1) on top on the right-hand side.
- Put second seat cushion and back cushion on top.



▷ Repeat the process in reverse order to convert the space back from the living to driving setup. Make sure that the seat belt buckle is inserted through the opening (Fig. 218,2).